

PROXIMITY Mifare reader - P50

System specifications

| | | |
|--------------------------------------|----------------------------|--|
| Cable Length | 5m/16ft | |
| Cable extension length and type | ≤ 25m/82ft ≤ 100m/328ft | Belden 9538/ Belden 5506FE (USA) Belden 9540/ Belden 5306FE (USA) |
| Token compatibility | Paxton EM Mifare | |
| Additional coloured covers available | Yes | |
| Handsfree compatible | Yes | |

Electrical

| | |
|---------------------|--------------|
| Operating Voltage | 10V - 14V DC |
| Current consumption | 170mA |

Environment

| | |
|-----------------------|---------------------------------|
| Operating temperature | -35°C - +66°C -31°F - +151°F |
| Moisture resistance | IPX7 |
| Vandal Resistance | 4 Medium |




The P50 mifare reader proximity readers are RFID devices that offer the convenience of contactless authentication for system users.

They are available for use with both Switch2 and Net2 systems. The readers are supplied with a choice of black or white covers/bezels. The reader is wired as shown on the control unit label.

Note: Be sure to avoid mounting proximity readers on metal surfaces or near other proximity readers as this will affect the read range.

A token is read by holding it within close proximity of the reader. Once a token has been read the control unit looks up the access permissions of that user. The control unit verifies the information and grants or denies access as appropriate.

By default, all 3 LEDs are lit. If access is granted, the green LED flashes. If access is denied, the red LED flashes. An audible tone is emitted in both cases.

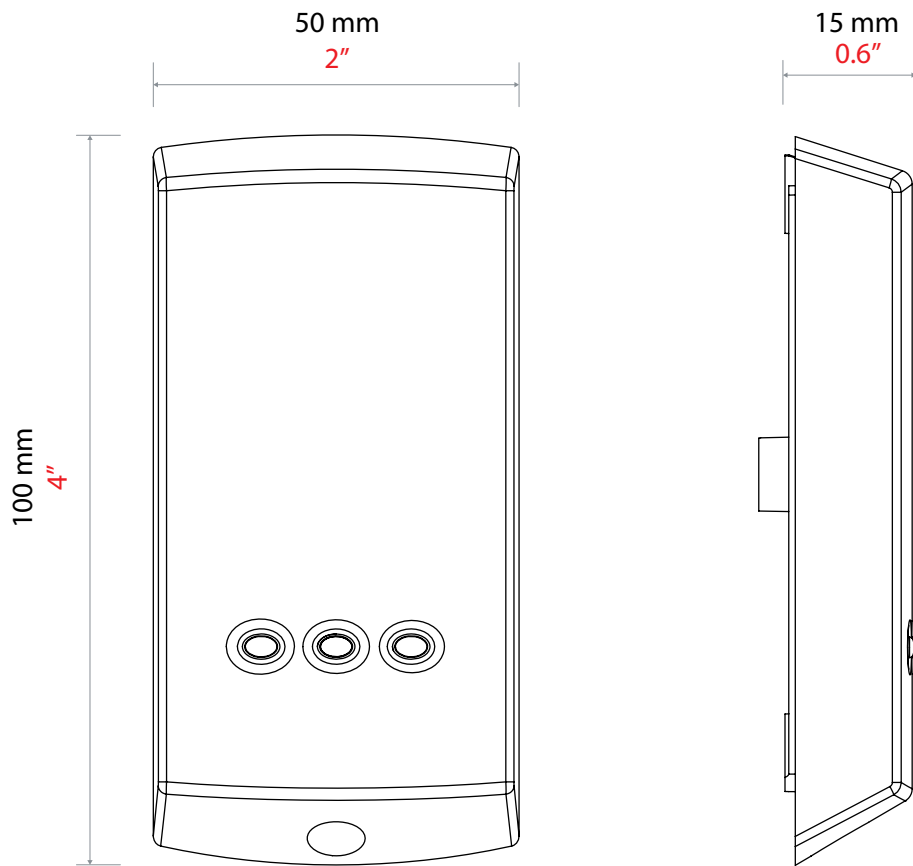

Accessories and sales codes

PROXIMITY Mifare reader - P50 353-467

